REV	ZONE	DESCRIPTION	DATE & ISSUED BY
01	B5	RATED SPEED Max. 2.0M/S → Max. 2.5M/S	2023.05.18 Roh,yh
02	B4,5,6	DD-SG1408B(HS) 파생모델등록	2024.01.03 Roh,yh

13K~24K	13K~24K	13K~24K	8K	APPROVED BY	3rd ANGLE PROJECTION	Development & Dash Co., LTD.		
				Lee.jh. 2018.12.12				
				DRAWN BY	CHECKERED BY	NAME	SAFETY GEAR ASS'Y	REV
G NO				Yang.hj. 2018.12.12		DWG NO	DD-SG1408B	SHEET 1 OF 1 / 02

07HS	08	07	06	DRAWING NO	NO	PART NAME	MATERIAL	REMARKS
1	1	1	1	DD-SG1408B	01	SAFETY GEAR ASS'Y		
			1	HS-22001-G06	02	FRAME	SS400 X 4.5T	
1	1	1	1	SB0824D2M	03	LINK SETS		
4		4	4	SB0824D3M-02	04	REINFORCEMENT PLATE	SS400 X 4.5T	
			2	SGAB1400BG06	05	SAFETY BLOCK ASS'Y		
1	1	1	1	DD-SW01410	06	UKS S/W(AC220V/10A,DC80V/2A,DC40V/4A)		
4	4	4	4	SB0824D3M-01	07	SIDE FRAME MOUNTING ANGLE	SS400	
		2		SGAB1400BG07	08	SAFETY BLOCK ASS'Y		
1		1		HS-22001-G07	09	FRAME	SS400 X 4.5T	
	2			SGAB1400BG08	10	SAFETY BLOCK ASS'Y		
	1			HS-22001-G08	11	FRAME	SS400 X 6T	
	4			SB0824D3M-03	12	REINFORCEMENT PLATE	SS400 X 6T	
2		2	2	SD1460D04-01	13	GUIDE SHOE MOUNTING PLATE	SS400 X 4.5T	
	2			SD1460D04-02	14	GUIDE SHOE MOUNTING PLATE	SS400 X 6T	
1	1	1	1	DB130510	15	SPRING		
2				SGAB1400BG07HS	16	SAFETY BLOCK ASS'Y		

01

	G NO.	MODEL NAME	APPLIED GUIDE RAIL (WIDTH OF GUIDE RAIL)	RATED SPEED OF CAR (M/S)	TOTAL LOAD (KG)	GUIDE RAIL SURFACE	
	06	DD-SG1408B	8K (10mm)	Max. 2.5 M/S	1200~2500 KG	DRY	OIL
	07		13K~24K (16mm)	Max. 2.5 M/S	1200~4200 KG		
	08		13K~24K (16mm)				
02	07HS	DD-SG1408B(HS)	13K~24K (16mm)	Max. 3.0 M/S	1200~4500 KG	DRY	

(01) SAFETY GEAR ASS'Y

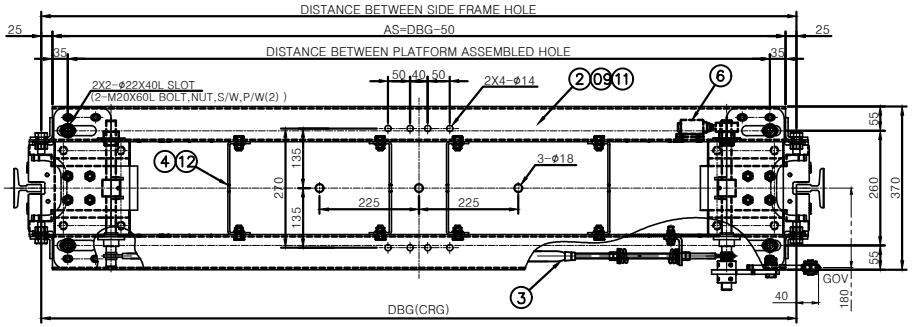

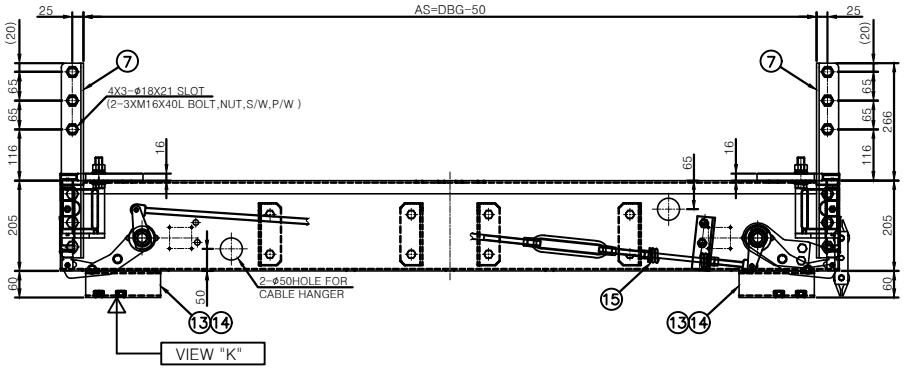

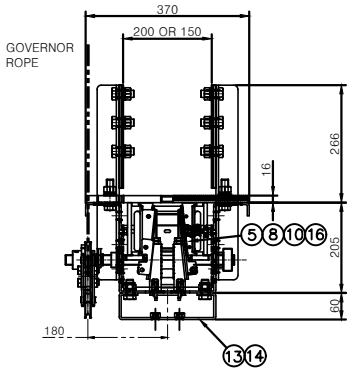

(L) NO. TABLE



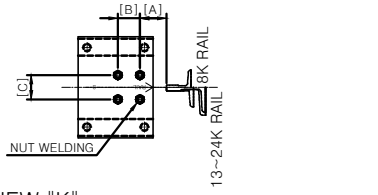

VIEW "K"

MOUNTING HOLE FOR GUIDE SHOE