REV	ZONE	DESCRIPTION	DATE & ISSUED BY

G NO	13K~24K	8K	APPROVED BY Lee,jh. 2024.08.28 / DRAWN BY Roh,yh. 2024.08.28	3rd ANGLE PROJECTION / CHECKERED BY	Development & Dash Co., LTD.		
					NAME	SAFETY GEAR ASS'Y	REV
					DWG NO	DD-SG3000B	SHEET 1 OF 1

G NO	53	52	DRAWING NO	NO	PART NAME	MATERIAL	REMARKS
	1	1	DD-SG3000B	01	SAFETY GEAR ASS'Y		
		1	HS-22001-G52	02	FRAME	SS400 X 4.5T	
	1	1	SB0824D2M	03	LINK SETS		
	2	2	SB3000B3M-02	04	REINFORCEMENT PLATE	SS400 X 4.5T	
		2	SGAB3000BG52	05	SAFETY BLOCK ASS'Y		
	1	1	DD-SW01410	06	UKS S/W(AC220V/10A,DC80V/2A,DC40V/4A)		
	4	4	SB0824D3M-01	07	SIDE FRAME MOUNTING ANGLE	SS400	
	2		SGAB3000BG53	08	SAFETY BLOCK ASS'Y		
	1		HS-22001-G53	09	FRAME	SS400 X 4.5T	
	2	2	SG3000B04-01	13	GUIDE SHOE MOUNTING PLATE	SS400 X 4.5T	
	1	1	DB130510	15	SPRING		

G NO.	MODEL NAME	APPLIED GUIDE RAIL (WIDTH OF GUIDE RAIL)	RATED SPEED OF CAR (M/S)	TOTAL LOAD (KG)	GUIDE RAIL SURFACE	
52	DD-SG3000B	8K (10mm)	Max. 2.5 M/S	750~2500 KG	DRY	OIL
53		13K~24K (16mm)		750~3200 KG		

(01) SAFETY GEAR ASS'Y

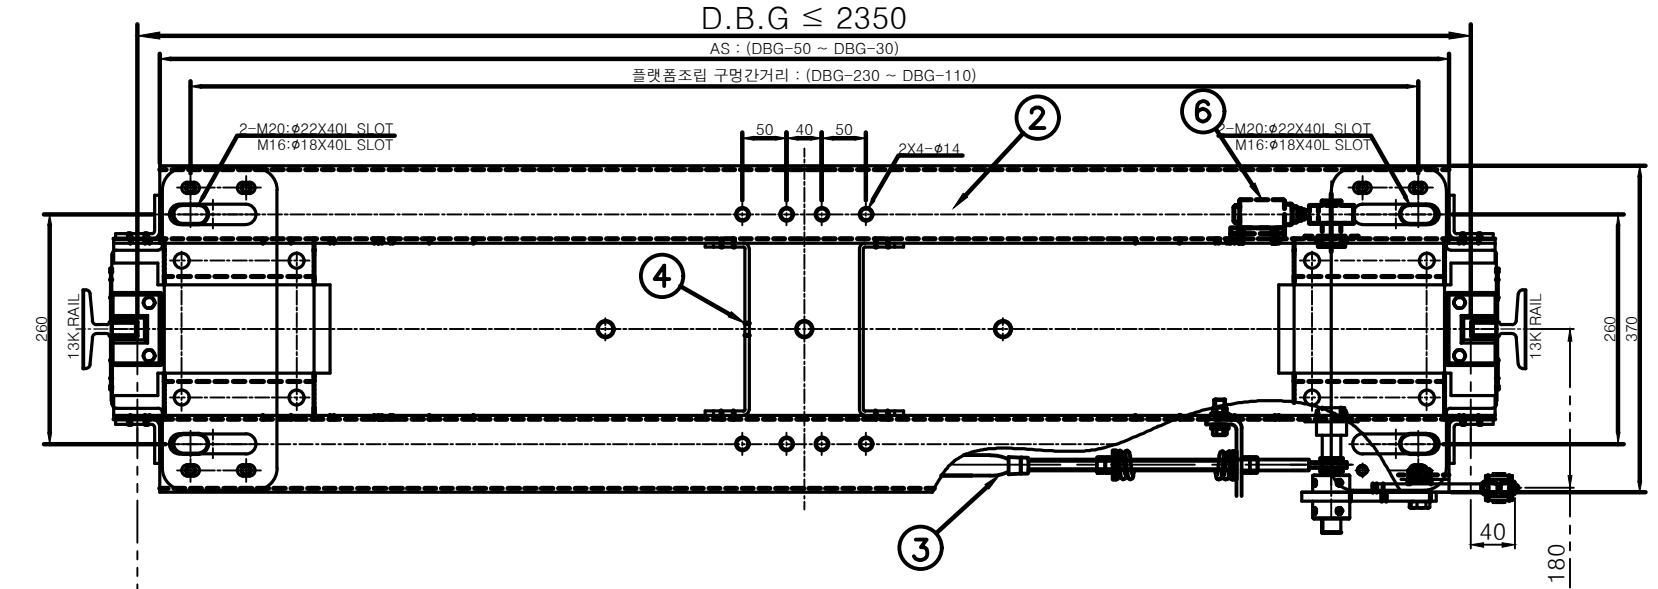

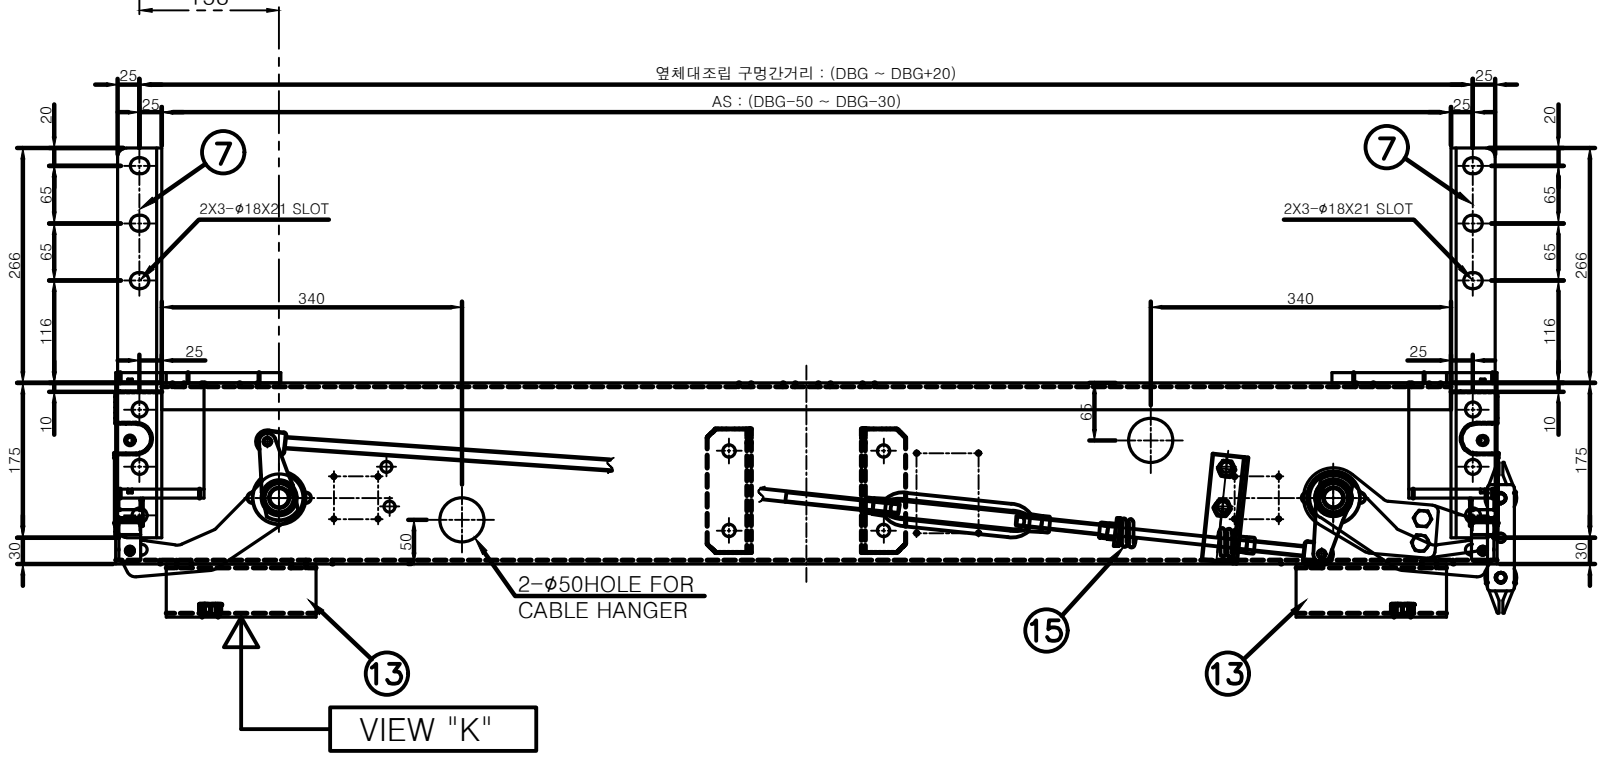



(L) NO. TABLE

LOCATION OF GOVERNOR MACHINE	
	
L01 (1,4위치)	L02 (2,3위치)



VIEW "K"

MOUNTING HOLE FOR GUIDE SHOE