





REV	ZONE	DESCRIPTION	DATE & ISSUED BY
A	D5,A5	RATED SPEED -1.0m/s, 3.0~4.0m/s → ~2.5m/s 로 변경, PULL THRU 600kgf 동일	2021.09.17 ROH.YH
B		주) 표기, TRIP HOOK 추가, 수동트립 와이어 적용.	2022.01.10 ROH.YH

※ Note


1. Allowable Tolerance : ± 0.3

2. GOVERNOR(HL) "R" TYPE



3. RATED SPEED 0.5m/s 이하는 0.5m/s와 동일하게 적용

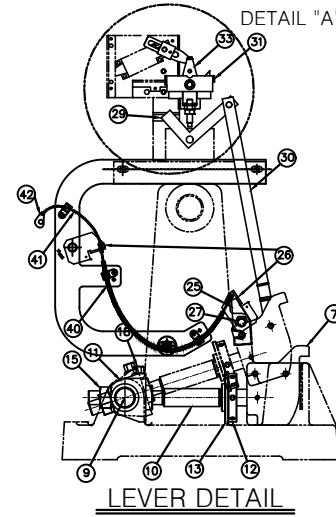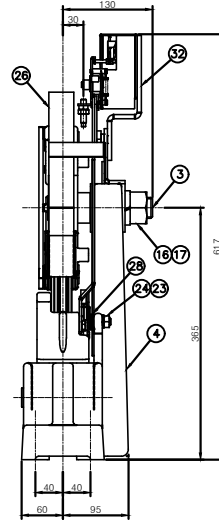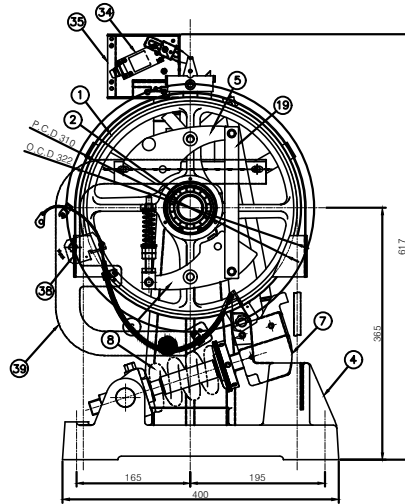

SWITCH POSITION: TRIP



VIEW "B"

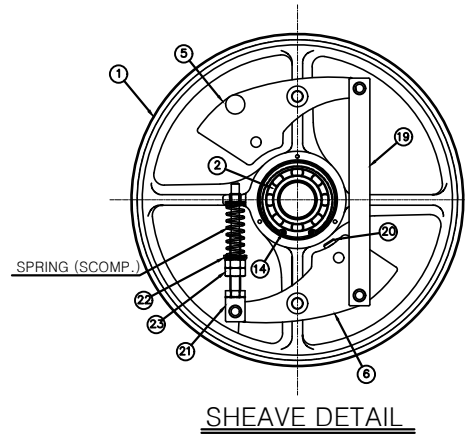

APPROVED BY Jwh, 2017.12.15 DRAWN BY Lee.jh, 2017.12.15										3rd ANGLE PROJECTION		Development & Dash Co., LTD.		
CHECKERED BY										NAME		GOVERNOR(HL) Ass'y		REV
DWG No.										DWG No.		GVAA100R_1		REV
DRAWING NO										P No.		PART NAME		REMARKS
7	6	5	4	3	2	1				1		GVAA100R_1	L1	GOVERNOR(HL) Ass'y
										2		GVAA100R_1	L2	GOVERNOR(HL) Ass'y
										3		GVAA100R_1	L3	GOVERNOR(HL) Ass'y
										4		GVAA100R_1	L4	GOVERNOR(HL) Ass'y
										5		GVAA100R_1	L5	GOVERNOR(HL) Ass'y
										6		GVAA100R_1	L6	GOVERNOR(HL) Ass'y
										7		GVAA100R_1	L7	GOVERNOR(HL) Ass'y
1	1	1	1	1	1	1	1	1	1	1	1	382G2	01	SHEAVE
2	2	2	2	2	2	2	2	2	2	2	2	620ZZ	02	BEARING
1	1	1	1	1	1	1	1	1	1	1	1	372FC	03	SHAFT-C
1	1	1	1	1	1	1	1	1	1	1	1	192JG	04	FRAME
1	1	1	1	1	1	1	1	1	1	1	1	468AS4	05	WEIGHT-B
1	1	1	1	1	1	1	1	1	1	1	1	468AS3	06	WEIGHT-C
1	1	1	1	1	1	1	1	1	1	1	1	221B	07	HEAD
1	1	1	1	1	1	1	1	1	1	1	1	414K1	08	COMP. SPRING
1	1	1	1	1	1	1	1	1	1	1	1	372FB	09	SHAFT-B
1	1	1	1	1	1	1	1	1	1	1	1	345BE	10	SPRING ROD
1	1	1	1	1	1	1	1	1	1	1	1	397A1	11	SPRING SHOE-A
1	1	1	1	1	1	1	1	1	1	1	1	397B1	12	SPRING SHOE-B
1	1	1	1	1	1	1	1	1	1	1	1	397H1	13	SPRING SHOE-H
1	1	1	1	1	1	1	1	1	1	1	1	R72	14	SNAP RING
1	1	1	1	1	1	1	1	1	1	1	1	M24HN	15	Hex NUT
1	1	1	1	1	1	1	1	1	1	1	1	M30SW	16	S/W
1	1	1	1	1	1	1	1	1	1	1	1	M30HN	17	Hex NUT
1	1	1	1	1	1	1	1	1	1	1	1	355C1	18	GUIDE SCREW
1	1	1	1	1	1	1	1	1	1	1	1	344V1	19	CONNECTING ROD
1	1	1	1	1	1	1	1	1	1	1	1	428EE1	20	STOPPER
1	1	1	1	1	1	1	1	1	1	1	1	345BD1	21	SPRING ROD
1	1	1	1	1	1	1	1	1	1	1	1	397W1	22	SPRING SHOE(SCOMP.)
3	3	3	3	3	3	3	3	3	3	3	3	M10HN	23	Hex NUT
1	1	1	1	1	1	1	1	1	1	1	1	M10SW	24	S/W
1	1	1	1	1	1	1	1	1	1	1	1	229Z2	25	HOOK
2	2	2	2	2	2	2	2	2	2	2	2	98ML1	26	BRACKET(HOOK)
1	1	1	1	1	1	1	1	1	1	1	1	74P3	27	BOLT(HOOK)
2	2	2	2	2	2	2	2	2	2	2	2	418R1	28	SPRING(HOOK)
1	1	1	1	1	1	1	1	1	1	1	1	0262CAB001	29	LEVER-B
1	1	1	1	1	1	1	1	1	1	1	1	262P4	30	LEVER-P
1	1	1	1	1	1	1	1	1	1	1	1	0262CAD001	31	LEVER-D
1	1	1	1	1	1	1	1	1	1	1	1	98NA2	32	BRACKET(LEVER)
1	1	1	1	1	1	1	1	1	1	1	1	262S2	33	SWITCH LEVER
1	1	1	1	1	1	1	1	1	1	1	1	KH8005-C	34	SWITCH Ass'y
1	1	1	1	1	1	1	1	1	1	1	1	84HK-2-2	35	SWITCH BOX
1	1	1	1	1	1	1	1	1	1	1	1	415AM1	36	SPRING(SWITCH)
1	1	1	1	1	1	1	1	1	1	1	1	355AS2	37	SCREW
1	1	1	1	1	1	1	1	1	1	1	1	155DM2	38	COVER
1	1	1	1	1	1	1	1	1	1	1	1	98ML2	39	HOOK BRACKET
1	1	1	1	1	1	1	1	1	1	1	1	-	40	TUBE
1	1	1	1	1	1	1	1	1	1	1	1	-	41	WIRE
1	1	1	1	1	1	1	1	1	1	1	1	98WH1	42	WIRE HANDLE

OUT GOING
D&D. DEVL. DEPT
2018.01.30

L No. TABLE -SPRING(SCOMP.) 적용표

L No.	RATED SPEED (m/s)	OVER SPEED (m/s)	TRIPING SPEED (m/s)	PULL THRU (kgf)	PULLEY P.C.D (mm)	ROPE DIA. (mm)	SPRING (SCOMP.) DWG. No.	P.No.	GOV. TYPE
1	~0.50	0.65~0.72	0.72~0.80	600	310	10	414DM1	L1	DISK TYPE
2	0.75	0.93~1.03	1.14~1.27				414DN2	L2	
3	1.00	1.16~1.28	1.34~1.48				414DP1	L3	
4	1.50	1.63~1.78	1.83~1.98				414DP5	L4	
5	1.75	1.95~2.10	2.15~2.30				414DP2	L5	
6	2.00	2.20~2.35	2.45~2.60				414DR1	L6	
7	2.50	2.80~2.95	3.05~3.20				414DR2	L7	