


| REV | ZONE |  | DESCRIPTION | DATE & ISSUED BY |
|-----|------|--|-------------|------------------|
|     |      |  |             |                  |
|     |      |  |             |                  |
|     |      |  |             |                  |

|   |     |                                    |  |                      |                                        |                              |         |
|---|-----|------------------------------------|--|----------------------|----------------------------------------|------------------------------|---------|
| G | No. | APPROVED BY<br>Lee.jh. 2019.03.07. |  | 3rd ANGLE PROJECTION | Development & Dash Co., LTD.<br>(주)디앤디 |                              |         |
|   |     | DRAWN BY<br>Roh.yh. 2019.03.07.    |  | CHECKERED BY         | NAME                                   | ROPE SOCKET ASS'Y (ø12,ø14용) | REV     |
|   |     | DWG NO                             |  | WSAD002(ø12~14)      |                                        |                              |         |
| 2 | 1   | DRAWING NO                         |  | P No.                | PART NAME                              | MATERIAL                     | REMARKS |
| 1 | 1   | WSAD002M01-P03                     |  | 01                   | SOCKET HEAD                            | SC45                         | -       |
|   | 1   | WSAD002M02-P02                     |  | 02                   | ROD                                    | S35C                         | -       |
| 1 |     | WSAD002M02-P03                     |  | 03                   | ROD                                    | S35C                         |         |
| 1 | 1   | WSAD002M05-04                      |  | 04                   | WEDGE                                  | FCD400                       | -       |
| 2 | 2   | ø5x38                              |  | 05                   | SPRIT PIN                              | -                            | -       |
| 1 | 1   | ø5x38                              |  | 06                   | "                                      | -                            | -       |
| 2 | 2   | M20                                |  | 07                   | NUT                                    | -                            | -       |
| 1 | 1   | M20                                |  | 08                   | PLAIN WASHER                           | -                            | -       |
| 1 | 1   | WSAD002M04-P03                     |  | 09                   | PIN                                    | S20C                         | -       |
| 1 | 1   | ø2x25                              |  | 10                   | SPRIT PIN                              | -                            | -       |
| 1 | 1   | V-88800048-P01                     |  | 11                   | SPRING (11x110)                        | -                            | -       |
| 1 | 1   | DAWS003-P01                        |  | 12                   | SPRING SEAT                            | S20C                         | -       |
| 1 | 1   | K8813188-P01                       |  | 13                   | CAP                                    | SPCC                         | -       |

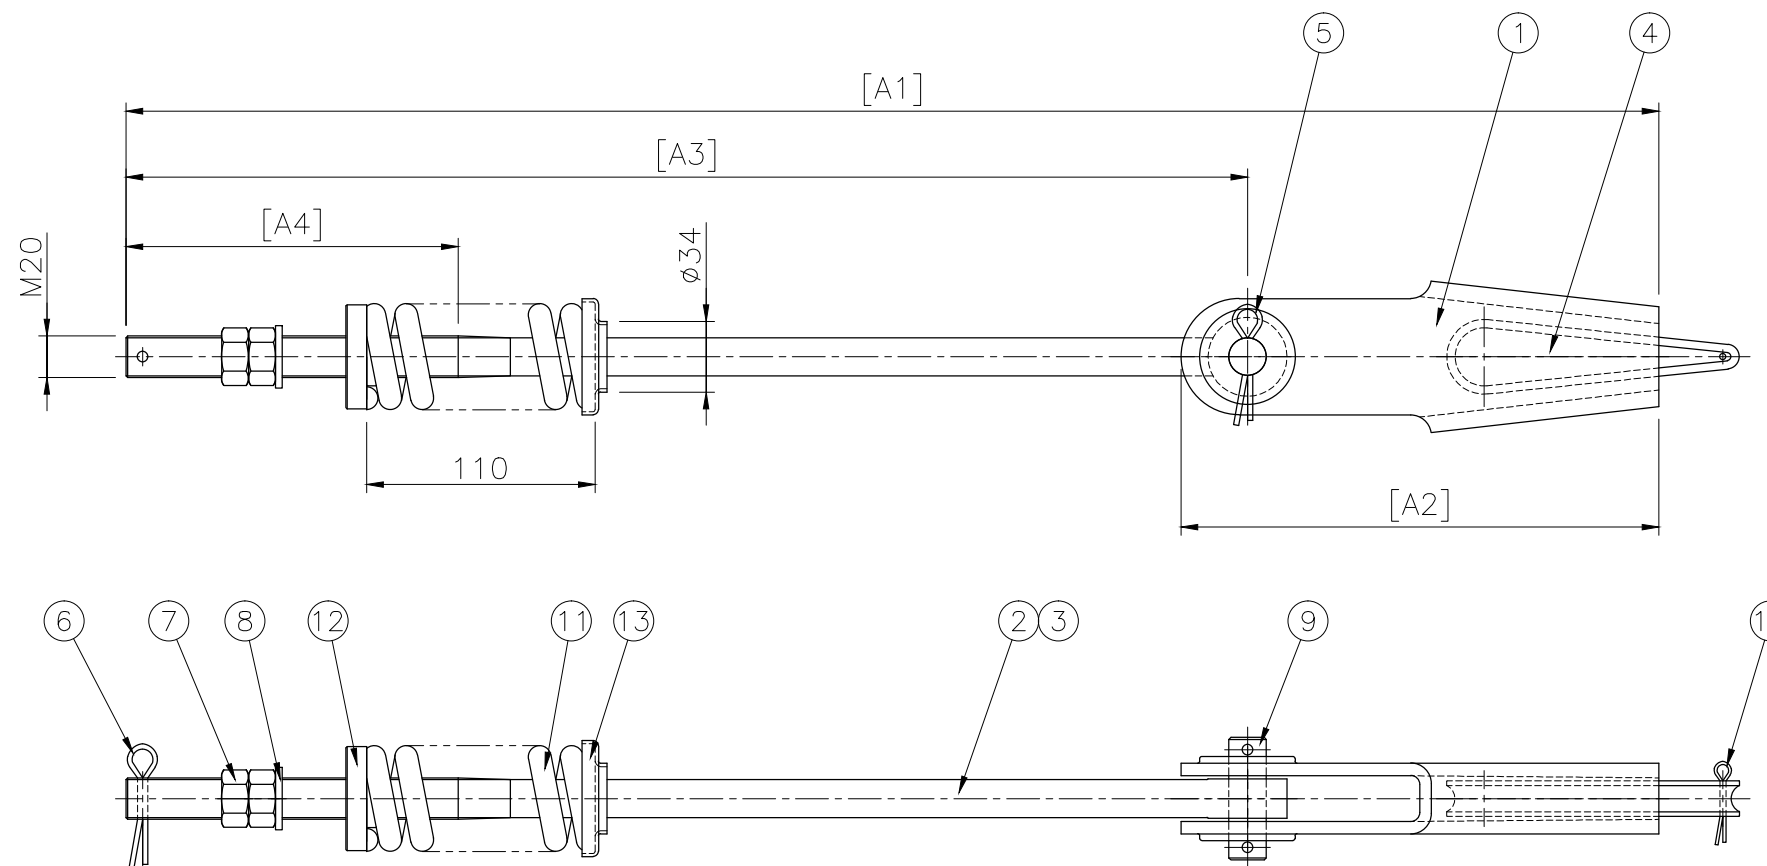

| G NO. | DRAWING NO. | DESCRIPTION<br>(로프X소켓총길이) | A1  | A2  | A3  | A4  | SPRING<br>(소선X자유장) | 축방향 인장파단하중 (kg) |
|-------|-------------|---------------------------|-----|-----|-----|-----|--------------------|-----------------|
| 01    | WSAD002G007 | 12, 14X738                | 738 | 230 | 540 | 250 | 11X110             | 12500 kg 이상     |
| 02    | WSAD002G006 | 12, 14X456                | 456 | 230 | 258 | 200 | 11X110             | 12500 kg 이상     |